(19) World Intellectual Property Organization

International Bureau



(43) International Publication Date 16 June 2005 (16.06.2005)

PCT

(10) International Publication Number WO 2005/053756 A1

(51) International Patent Classification⁷: A01M 1/20, B60H 3/00

A61L 9/12,

(21) International Application Number:

PCT/CH2004/000719

(22) International Filing Date:

30 November 2004 (30.11.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 60/526,328

2 December 2003 (02.12.2003) US

(71) Applicant (for all designated States except US): GIVAU-DAN SA [CH/CH]; Chemin de la Parfumerie 5, CH-1214 Vernier (CH).


- (72) Inventors; and
- (75) Inventors/Applicants (for US only): MCGEE, Thomas

[GB/US]; 34 Village Gate Way, Nyack, NY 10960 (US). BROWN, Colin [GB/GB]; 135 Binfield Road, Bracknell, Berkshire RG42 2BD (GB).

- (74) Agent: MCSTEA, John, Anthony; Ueberlandstrasse 138, CH-8600 Duebendorf (CH).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE,

[Continued on next page]

(54) Title: APPARATUS FOR EMITTING A VOLATILE LIQUID INTO THE ATMOSPHERE

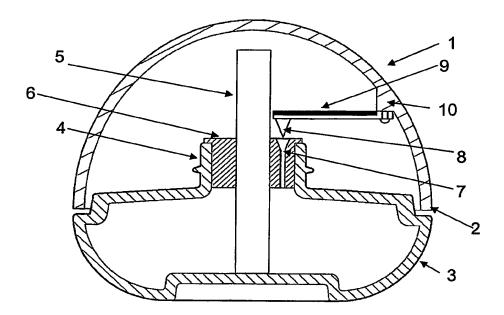

(57) Abstract: An apparatus (1) for the dissemination of volatile liquid into an atmosphere comprises a reservoir (3) containing the liquid, and a porous evaporative member (5) that extends from the liquid into the atmosphere, the reservoir being directly open to the atmosphere only by a pressure equalisation vent (7), which vent is equipped with closing means (8) that obstructs the vent (7) to an increasing degree with increasing atmosphere temperature, optionally closing it completely. The apparatus thus reduces considerably the excessive loss of fragrance encountered in atmospheres that can get very hot, for example, automobile interiors.



WO 2005/053756 A1



SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

with international search report